




F1G. 1

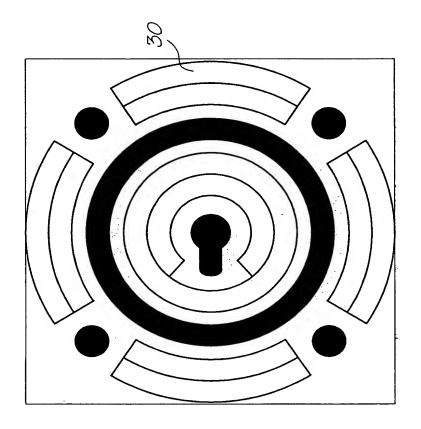


F1G. 3

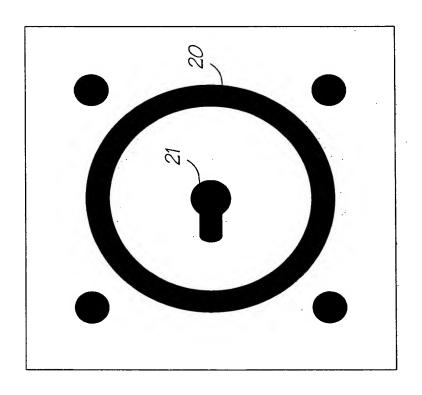


F16.2

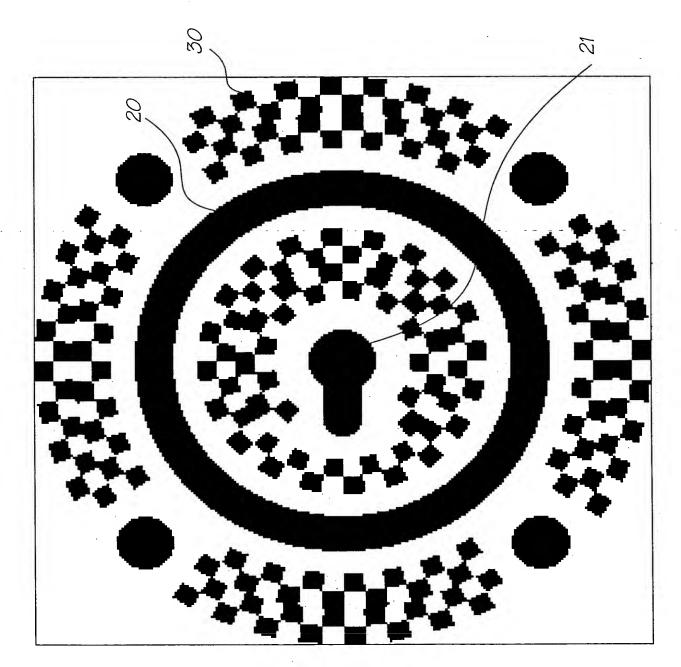


16.4

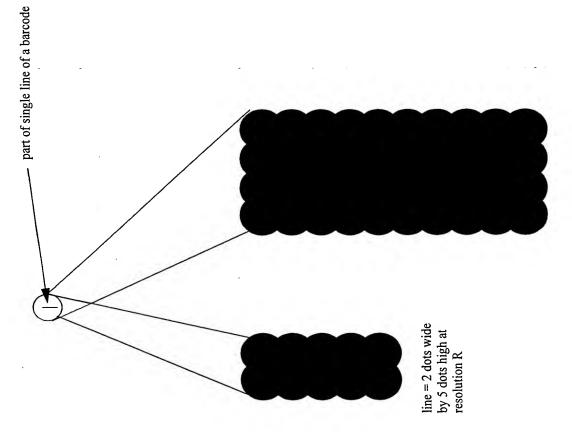

line = 4 dots wide by 10 dots high at resolution 2R

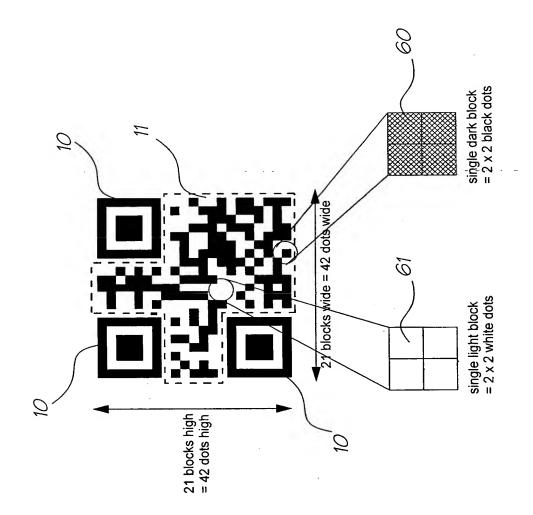

F10. 0



always 1 (background)	data bit 2	data bit 3
always 1 (background)	data bit 1	data bit 5
always 1 (background)	data bit 0	data bit 4

C	ζ	7
(7	5
Ī	Ī	-

		▓	\bowtie		₩	8			Qq	2	ይ	2	2			72	70	70	72	72	
₩		▓	\otimes	₩	₩	▓	₩	요	2	2	2	요	요	2	72	72	7	72	7	72	4
₩	₩	▩	₩	₩	₩	▓	▩	요	8	g	요	ይ	2	рО	4	4	72	7	4	72	4
	₩	▩	₩	₩	₩	88	▩	요	p0	ъ0	b0	p0	S	9	b 4	p4	b 4	4	b 4	p4	b4
	₩	▩	₩	₩	₩		▩	١	요	요	ይ	90	b0	b0	b 4	b4	4	b 4	b 4	b4	h4
	₩	▩	₩	燚	₩	▩	▩	8	90	90	b0	요	g	b0	b 4	b4	b4	b4	72	b4	h4
	縱	▩	₩	₩	₩	8			g	90	p0	8	b0			b4	b4	b4	b4	b 4	
₩	₩	▩	₩	₩	₩	8			b1	b1	p.	5	b 1			b5	b 5	b5	p2	9q	
₩	₩	₩	₩	₩	₩	縱	▩	51	b 1	b1	b1	b 1	5	b1	9 q	p2	p5	b 5	b 5	b5	h5
	▓	▩	₩	₩	₩		▓	b1	b1	b1	b1	b 1	b1	b 1	p5	92	92	b 5	b5	b 5	h5
	縱	▩	₩	₩	₩	▓	▩	b	p1	b 1	b1	b1	b1	þ1	9 q	p5	9 q	b5	9 q	9	75
	₩	₩	₩	₩	₩	***	▩	5	5	b1	b1	b1	b1	b 1	p2	p2	p2	p2	p 2	9 q	7
	₩	▩	₩	₩	₩	▓	▩	2	5	<u>1</u> 9	b1	b1	b 1	b1	p2	92	b5	p2	p2	9 q	4
. K≥	∞₩	КХХ	XXX	KXX	⋘	XXI.	i		ᅙ	5	5	P	b1			53	p2	92	p2	p2	
	₩	₩	₩	₩	▓	X			20	23	22	52	P2	<u> </u>		8	ಜ	23	53	ಜ	L
XXX	▓	₩	₩	₩	₩	▩	₩	b 2	2	8	22	20	2	22	ಜ	2	ಜ	8	ಣ	23	3
	▓	燚	燚	₩	▩	▩	燚	p2	2	22	22	2	p2	P2	ಜ	<u>p3</u>	ಜ	23	ಜ	23	3
	▓	燚	燚	₩	▓	▩	▓	b2	22	p2	2	52	20	P2	P3	8	p3	23	23	23	2
	₩	燚	燚	₩	₩	▩	₩	b2	20	20	20	52	52	2	2	ಜ	ಜ	P3	ಜ	b3	3
	₩	₩	₩	₩	₩	▩	燚	_{p2}	2	22	22	b2	p2	2	2	2	2	2	<u>p3</u>	ಣ	3
XXXX	- K	₩	₩	₩			∞	Ŀ	22	22	22	62	22	L		83	ဋ	53	23	<u>6</u>	

constant 1

b0 data bit 0

b1 data bit 1

b2 data bit 2

b3 data bit 3

b4 data bit 4

b5 data bit 5

21 6

21 entries